

Datasheet

Subject to technical alteration
Issue date: 14.04.2021 • A112

**» APPLICATION**

Outdoor sensor measuring light, temperature, humidity and atmospheric pressure typically used in lighting applications to optimise energy efficiency through lighting control. The device is designed for outdoor areas, greenhouses, warehouses or industrial halls. The device has an integrated ambient light sensor with precise optical filtering adapted to the human eye. The devices with relay outputs for a 2-point controller or a 2-stage 2-point controller allow for a wide range of applications. Depending on the model, the sensor can be individually configured via Thermokon USEapp. Tool-free opening, closing and wiring as well as removable cable entries ensure quick and easy installation.

» TYPES AVAILABLE**Outdoor sensor light – active 0..10 V | 4..20 mA**

Li65+ V
Li65+ A

Outdoor sensor light + temperature – active 2x 0..10 V | 2x 4..20 mA

Li65+ VV
Li65+ AA

Outdoor sensor light + temperature + humidity + atmospheric pressure (opt.) – active 3x/4x 0..10 V

Li65+ 3xV
Li65+ 4xV

Outdoor sensor light + temperature – active 2x 0..10 V + Relay

Li65+ VV Relay

» SECURITY ADVICE – CAUTION

The installation and assembly of electrical equipment should only be performed by authorized personnel.

The product should only be used for the intended application. Unauthorised modifications are prohibited! The product must not be used in relation with any equipment that in case of a failure may threaten, directly or indirectly, human health or life or result in danger to human beings, animals or assets. Ensure all power is disconnected before installing. Do not connect to live/operating equipment.

Please comply with

- Local laws, health & safety regulations, technical standards and regulations
- Condition of the device at the time of installation, to ensure safe installation
- This data sheet and installation manual

» NOTES ON DISPOSAL

As a component of a large-scale fixed installation, Thermokon products are intended to be used permanently as part of a building or a structure at a pre-defined and dedicated location, hence the Waste Electrical and Electronic Act (WEEE) is not applicable. However, most of the products may contain valuable materials that should be recycled and not disposed of as domestic waste. Please note the relevant regulations for local disposal.

» BUILD-UP OF SELF-HEATING BY ELECTRICAL DISSIPATIVE POWER

Temperature sensors with electronic components always have a dissipative power, which affects the temperature measurement of the ambient air. The dissipation in active temperature sensors shows a linear increase with rising operating voltage. This dissipative power has to be considered when measuring temperature. In case of a fixed operating voltage ($\pm 0,2$ V) this is normally done by adding or reducing a constant offset value. As Thermokon transducers work with a variable operating voltage, only one operating voltage can be taken into consideration, for reasons of production engineering. Transducers 0..10 V / 4..20 mA have a standard setting at an operating voltage of 24 V =. That means, that at this voltage, the expected measuring error of the output signal will be the least. For other operating voltages, the offset error will be increased by a changing power loss of the sensor electronics. If a re-calibration should become necessary later directly on the sensor, this can be done by means of the USEapp software and an optional Bluetooth interface.

» APPLICATION NOTICE FOR HUMIDITY SENSORS

Refrain from touching the sensitive humidity sensor/element. Touching the sensitive surface will void warranty.

For standard environmental conditions re-calibration is recommended once a year to maintain the specified accuracy.

When exposed to high ambient temperature and/or high levels of humidity or presence of aggressive gases (i.e. chlorine, ozone, ammonia) the sensor element may be affected and re-calibration may be required sooner than specified. Re-calibration and deterioration of the humidity sensor due to environmental conditions are not subject of the general warranty.

» **TECHNICAL DATA**

Measuring values	temperature, light, humidity, atmospheric pressure	
Output voltage	1..4x 0..10 V or 0..5 V (adjustable via jumper; live-zero configuration via Thermokon USEapp), min. load 10 k Ω	
Output ampere <i>(type-dependent)</i>	A AA 1x/2x 4..20 mA, max. load 500 Ω	
Output switch contact <i>(type-dependent)</i>	Relay 2 floating contacts for 24 V ~ or 24 V = / 3 A	
Power supply	V VV 15..35 V = or 19..29 V ~ SELV	A AA 15..35 V = SELV
Power consumption	typ. 0,6 W (24 V =) 1,5 VA (24 V ~)	
Measuring range temp.	-40..+60 0..+50 -20..+80 -15..+35, adjustable at the transducer, default setting: -20..+80 °C, (optional)	
Measuring range humidity	0..100% rH non-condensing, (optional)	
Measuring range light	0..200 Lux 0..1000 Lux (default) 0..2 kLux 0..10 kLux 0..20 kLux 0..50 kLux, selectable at the device	
Measuring range atm. pressure	500..1500 hPa, (optional)	
Accuracy temperature	$\pm 0,5$ K (typ. at 21 °C)	
Accuracy humidity	$\pm 2\%$ between 10..90% rH (typ. at 21 °C)	
Accuracy light	typ. $\pm 5\%$ of measuring value	
Sensor	Ambient light sensor with precise optical filtering appropriate to the human eye	
Enclosure	enclosure USE-M, PC, pure white, cover PC, translucent	
Protection	IP65 according to EN 60529	
Cable entry <i>(type-dependent)</i>	V(V) A(A) 3xV 4xV Flextherm M20, for wire $\varnothing=4,5..9$ mm, removable	Relay M25 with fourfold cable entry for wire with max. $\varnothing=7$ mm, removable
Connection electrical	removeable plug-in terminal, max. 2,5 mm ²	
Ambient condition	-30..+70 °C, max. 85% rH short term condensation	

» **PRODUCT TESTING AND CERTIFICATION****Declaration of conformity**

The declaration of conformity of the products can be found on our website <https://www.thermokon.de/>.

» **APPLICATION NOTICE**

The housing cover must be completely closed in order to ensure the accuracy and reproducibility of the measured values during a test or service log via USEapp.

The Bluetooth dongle snaps into the socket easily. When removing, please fix the plug-in card (option PCB) so that it is not unintentionally pulled out.

» CONFIGURATION



The Thermokon bluetooth dongle with micro-USB is required for communication between USEapp and USE-M / USE L (Item No.: 668262). Commercial bluetooth dongles are not compatible.




Application-specific reconfiguration of the devices can be performed using the Thermokon USEapp. The configuration can be performed only when the device is powered.



The configuration-app and the app description can be found in the Google Play Store or in the Apple App Store.


» MOUNTING ADVICES

In case of outdoor installation avoid direct rain and sun contact. Cable entry from bottom or side. For side cable routing set loop so that precipitation can drain defined. Observe permissible ambient condition.

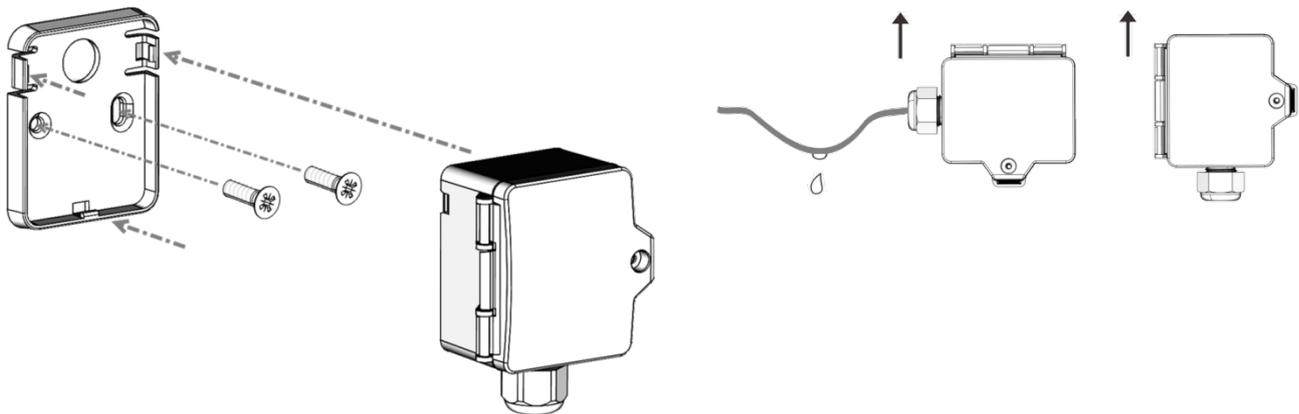


» CONNECTION PLAN

LI65+ V




0.5 V
0..10 V




n.c.
AOU1 } (light | 0..10 V)
GND }
UB+ } (15..35 V = or 19..29 V ~)

LI65+ A



0.5 V
0..10 V




n.c.
AOU1 } (light | 0..10 V)
GND } (15..35 V =)
UB+ }




n.c.
AOI1 } (light | 4..20 mA)

LI65+ VV




0.5 V
0..10 V




(temperature | 0..10 V)
(light | 0..10 V)
(15..35 V = or 19..29 V ~)

LI65+ AA



0.5 V
0..10 V




(temperature | 0..10 V)
(light | 0..10 V)
(15..35 V =)




(temperature | 4..20 mA)
(light | 4..20 mA)

LI65+ 3xV



0.5 V
0..10 V




(temperature | 0..10 V)
(light | 0..10 V)
(15..35 V = or 19..29 V ~)



(humidity | 0..10 V)

LI65+ 4xV



0.5 V
0..10 V




(temperature | 0..10 V)
(light | 0..10 V)
(15..35 V = or 19..29 V ~)




(atm. pressure | 0..10 V)
(humidity | 0..10 V)


LI65+ VV Relais




0.5 V
0..10 V




(temperature | 0..10 V)
(light | 0..10 V)
(15..35 V = or 19..29 V ~)




(Relay 2 | NO)
(Relay 1 | NO)

» **DIP SWITCH CONFIGURATION****Measuring range light - DIP 1..3**

#0 (factory default)
 SI = 0..1 kLux
 IMP = 0..100 fc




#1
 SI = 0..0,2 kLux
 IMP = 0..20 fc




#2
 SI = 0..2 kLux
 IMP = 0..200 fc




#3
 SI = 0..10 kLux
 IMP = 0..1000 fc




#4
 SI = 0..20 kLux
 IMP = 0..2000 fc




#5
 SI = 0..50 kLux
 IMP = 0..5000 fc

Measuring range temperature - DIP 4,5


#0 (factory default)
 SI = -20..+80 °C
 IMP = 0..+200 °F




#8
 SI = 0..+50 °C
 IMP = +40..+140 °F




#16
 SI = -40..+60 °C
 IMP = -40..+160 °F



#24
 SI = -15..+35 °C
 IMP = 0..+100 °F


System of units - DIP 6

#0 (factory default)
 SI



#32
 IMP

» DIMENSIONS (MM)

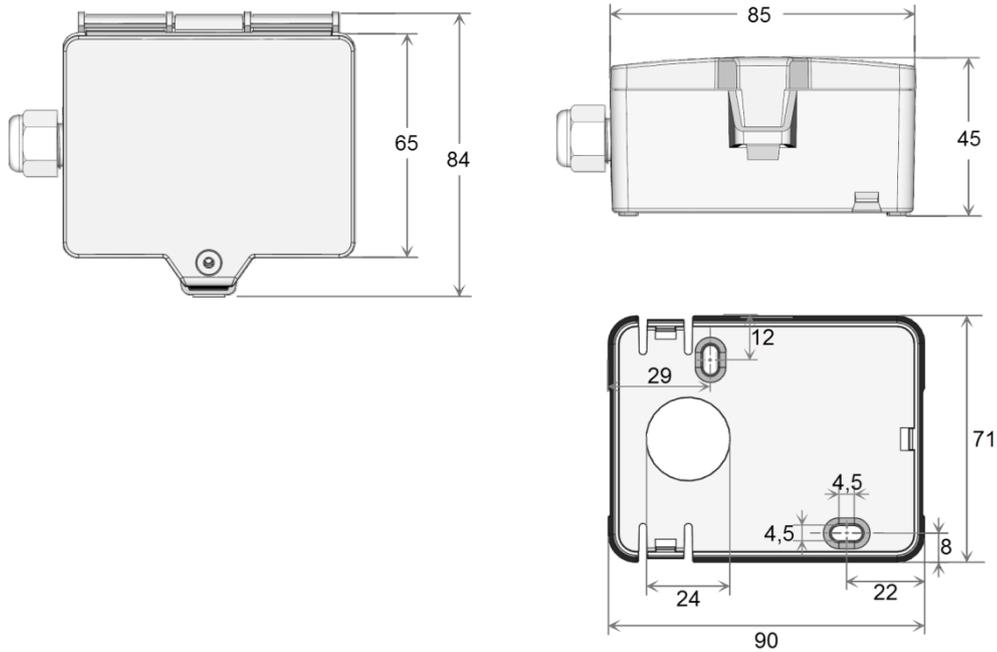

» ACCESSORIES (INCLUDED IN DELIVERY)

Mounting base
 Mounting kit universal
 • Cover screw + screw cover • 2 Rawlplugs • 2 Screws (countersunk head) • 2 Screws (rounded head)

Item No. 631228
 Item No. 698511

» ACCESSORIES (OPTIONAL)

Bluetooth dongle
 Cable entry M25 USE white, sealing insert 4x $\varnothing=7$ mm (4 pcs)

Item No. 668262
 Item No. 641364